




Trowelable Flooring
Underlayment & Patch

PrepPro Feather

Achieve flawless floors fast with **PrepPro Feather™**—a rapid-drying, trowel-applied underlayment that smooths imperfections with minimal effort. Its creamy consistency ensures easy application, ready for flooring in just 30 minutes!

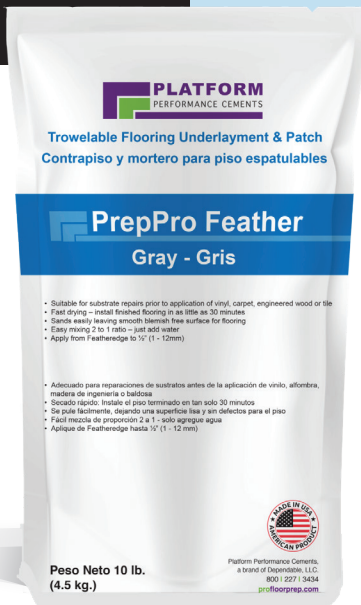

FEATURES

- › Outstanding flexural strength
- › Designed for approved wood and gypsum substrates
- › Durable high strength specialty cement
- › Non-alkaline – adhesive friendly
- › Withstands construction/renovation traffic

SUITABLE SUBSTRATES

- › Concrete
- › Masonry
- › Wood
- › Ceramic tile
- › Terrazzo
- › Properly prepared residue of cutback and non-water soluble adhesive
- › Epoxy moisture vapor membranes (free from amine blush)



Quick, Effortless Floor Prep for a Flawless Finish

PrepPro Feather™ is a latex modified, fine textured, fast-drying underlayment for indoor floors that's easy to apply. Just add water to get a creamy mix, trowel it on, and you'll have a perfect base for your vinyl, carpet, engineered wood, or tile flooring. **PrepPro Feather™** is quick drying to allow installation of floor coverings in just 30-60 minutes.

Properties

Working Time	15 Minutes
Time to foot traffic	30 Minutes
Application Conditions	50°F to 90°F (10-32°C)
Flammability	Flame Spread 0, Smoke Development 0, Fuel Contribution 0
Application Depth	Suitable from feather to ½" (12mm) in depth
Coverage	100 – 300 sq ft per bag at feather Approx 16.5 sq ft @ 1/4" Approx. 33 sq ft @ 1/8"
Water per 10lb unit	Approx. 33 sq ft @ 1/8"
Color	Gray brown
Shelf Life	9 Months when unopened & stored per instructions
SKU	DPPF4X10

All specifications were tested in laboratory conditions: 73°F in a controlled environment using our approved water content. Changing the temperature, or mixing ratios, or the environment can effect these specifications. Call Technical Services if you have any questions.



LEED Credit LCD Rapid may contribute to LEED certification of projects as follows:

AREA	CREDIT	CATEGORY	HOW
Indoor Environmental Quality	EQ 4.2	Low Emitting Materials	VOC content 0g/l (calculated)
Regional Manufactured Material	MR 5.1, 5.2	Regional Materials (Cleveland, OH)	25%

Dependable LLC

2926 Chester Avenue, Cleveland, OH 44114
(877) 514-5336

Visit: FloorPrep.com
info@floorprep.com

